




PRODUCT BULLETIN

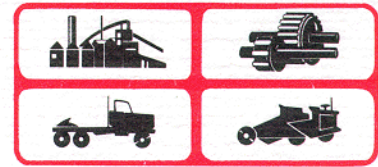

225 WHITE MACHINERY LUBRICANT

"Specifically designed for use where a clean, non-toxic USDA approved H-1 Heavy Duty lubricant is required."

DESCRIPTION:

This product is specially formulated to comply with the requirements of the Federal Food, Drug and Cosmetic Act for lubricants with incidental food contact under Subpart F, Section #121.2553, Food Additive Amendment.

United States Department of Agriculture (USDA) approved and classified H-1. It is also in compliance with CFR, Title 21, Paragraph 178.3570 of the Food and Drug Administration regulations. Authorized for use under USDA poultry, meat, rabbit and egg products inspection.

Superior where heat, steam, water and mild acid create severe operating conditions.

This product is certified to contain no Chlorinated Naphthalenes, Lead Napthanates nor Chlorinated Byphenols.

Surpasses 35 O.K. Timken Load.

APPLICATIONS:

A multi-purpose lubricant for all grease lubricated machinery in meat packing, bottling plants, canneries, bakeries, dairies, poultry and frozen food operations.

Excessive lubrication should be avoided to meet federal requirements. Lubrication should not contaminate processed food to a degree greater than 10 PPM (parts per million).

USER BENEFITS:

- * NON-TOXIC
- * USDA APPROVED H-1
- * EXCELLENT WATER RESISTANCE
- * RESISTS HIGH TEMPERATURES
- * RESISTANT TO MILD ACIDS
- * VERY TACKY
- * LOWER MAINTENANCE
- * EXTENDED LUBE INTERVALS
- * DISTINCTIVE COLOR

TYPICAL DATA:

STEELCO CODE NO.	225-2
NLGI No.	2
Penetration (worked)	280
Dropping Point, °F.	470
Thickener	Aluminum Complex
Timken Load, Lbs.	35+
Color	White
Base Oil:	
Vis SUS @ 100°F.	350
Vis SUS @ 210°F.	49
Viscosity Index, Min.	95
Flash Point, °F.	420
Pour Point, °F.	0

AUTHORIZED DISTRIBUTOR: